

VOLVO 122 S




color combinations



A product of superb Swedish engineering

Light blue leatherette upholstery

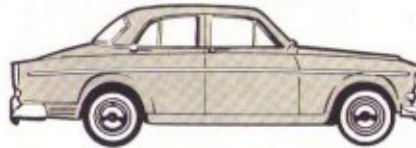


Light grey



Light green




Light brown leatherette upholstery

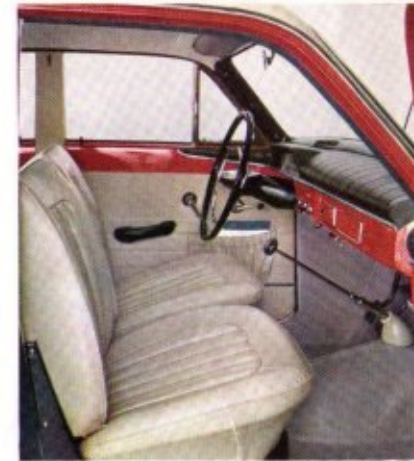

Light grey leatherette upholstery

White

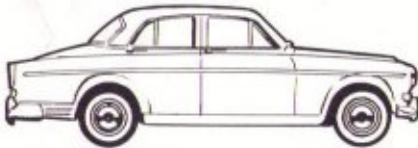

Slate blue



Black



Red with light grey top



AB VOLVO

**SALES
DEPARTMENT**

**GÖTEBORG
SWEDEN**

Importers:

VOLVO IMPORT, INC.,
452 Hudson Terrace,
Englewood Cliffs,
New Jersey

Distributors:

**VOLVO DISTRIBUTING,
INC.,**
452 Hudson Terrace,
Englewood Cliffs,
New Jersey

**SWEDISH MOTOR
IMPORT, INC.,**
3301 West 12th Street,
Houston 24, Texas

AUTO IMPORTS, INC.,
12925 Riverside Drive,
Sherman Oaks, Calif.

In Canada:

**AUTO IMPORTS
(SWEDISH) Ltd.**
Head Office
1130 W. Georgia St.,
Vancouver 5, B. C.
Branch Office:
440 Constock Road,
Scarborough
(Toronto), Ont.

Engine

Four-cylinder, overhead valve, type B16B

Bore

3.125"

Stroke

3.15"

Displacement

96 cu. in. (1.58 litres)

Compression ratio

8.2:1

Output

85 b.h.p. at 5,500 r.p.m.

Torque

87 lb.-ft. at 3,500 r.p.m.

Oil filter

Fullflow

Carburetors

Twin SU horizontal

Transmission

Four-speed, fully synchronized

Rear axle

Hypoid type. Ratio 4.56:1

Steering gear

Cam and roller

Front suspension

Individual suspension with coil springs and con-

trol arms. Double-acting hydraulic, telescopic shock absorbers. Stabilizer

Rear suspension

Coil springs. Rear axle carried on two rubber-mounted support arms, two torque arms and a track bar. Double-acting hydraulic, telescopic absorbers

Foot brakes

Self-centering hydraulic Duo-Servo brakes, total brake lining area 165 sq. in.

Hand brake

Mechanical operation on rear wheels only.

Wheels

Pressed steel disk type. All wheels balanced

Tires

Tubeless, low pressure 5.90—15"

Body

All-welded, integral construction steel body.

Thoroughly rust-proofed and completely undersealed

Instrumentation

Padded instrument panel containing combined instrument with fuel gauge, temperature gauge, speedometer, mileometer, tripmeter. Panel also contains warning lamps for battery charging, oil pressure, directional signals, headlamp beams.

Heater, defroster and fresh air system

Controls grouped in center of instrument panel.

Air intake in front of windshield

Safety belt fittings

Fittings for VOLVO safety belts

Greasing

Greasing and oil change only necessary after every 3,000 miles

Wheelbase

102 1/2"

Overall length

175"

Overall width

63 1/4"

Height, unloaded

59 1/4"

Tread, front

51 1/4"

Tread, rear

51 1/4"

Weight

2,400 lb. (incl. fuel, oil, water).

The factory reserves the right to modify prices, design and equipment

RK 154. 150 000. 3. 61.

Printed in Sweden. AAA/ © VOLVO AB GÖTEBORG